

**Figure A**  
**"Stock" Gravity Down**  
**Position**

Tools Required: 9/16" and 16mm open end wrench. Catch Pan / Rags for any oil spilling.

Replace / fill tank after conversion to full line with ATF Dextron III.


Video available at [www.gstrailers.com/videos.html](http://www.gstrailers.com/videos.html)

## **Congratulations on the purchase of your Ice Castle on a GS Trailer.**

**All GS Trailers dated 4/18 come with the 90 degree elbow coming out of the T with a cap. All trailers are shipped in the stock "Gravity Down" position. To switch your trailer to a Power Tongue - Remove Hose "A" at the fitting.**

**Remove Cap "B". Switch locations and tighten.**

**Trailer must be sat on the ground, and system relaxed with pressure relieved by slowly cracking the red hose "C". Tighten all fitting and check for leaks. Do not over-tighten fitting.**

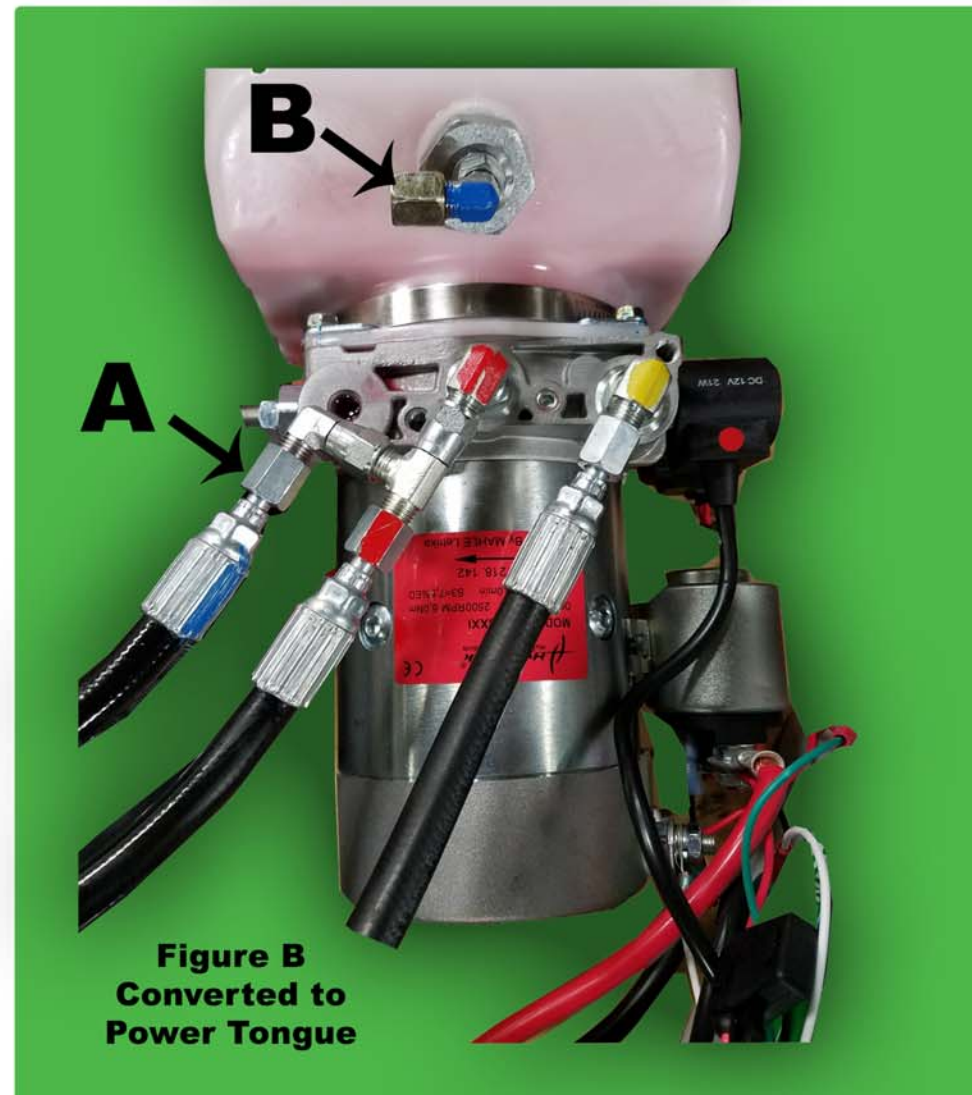

**Figure B**  
**Converted to**  
**Power Tongue**